

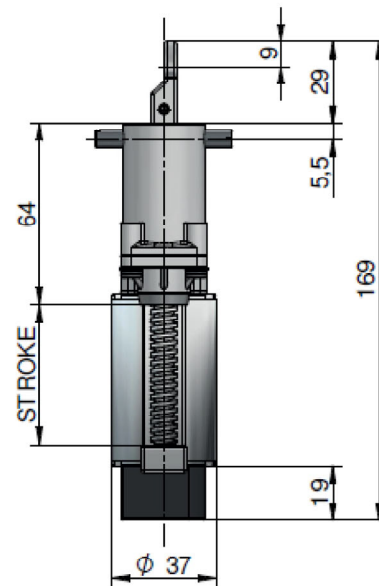
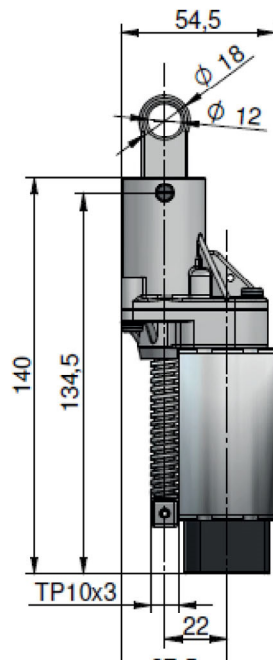


AxiPro MA-serie (standaard met encoder)

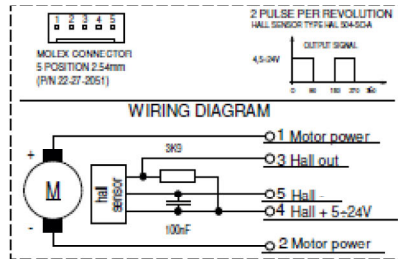

TECHNICAL DATA

DESCRIPTION	VALUE	
Supply Voltage (VDC)	12	24
Stroke (mm)	50÷300	
No load speed (mm/s)	2,7÷20	5÷40
Max load (N):	1600	2100
Gear Ratio	1:12	1:50
Spindle nut Material	POM	
Trapezoidal screw	TP10x3	
Duty Type	S1, S2, S3	
Pulses/revolution Hall sensor on motor shaft	2	
Weight (Kg)	< 0,7	



AXIS & Stuifmeel BV
 Coenecoop 1
 2741 PG Waddinxveen
 Netherlands
 Tel: +31 (0)182 64 70 70
www.axis-stuifmeel.nl
info@axis-stuifmeel.nl